

# GLADIATOR™ Chillerator® Garage Refrigerator


## PRODUCT MODEL NUMBERS

GARF19XXVK

**Electrical:** A 115-Volt, 60-Hz, AC-only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your convertible refrigerator/freezer be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

**NOTE:** Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting.


## OVERALL DIMENSIONS

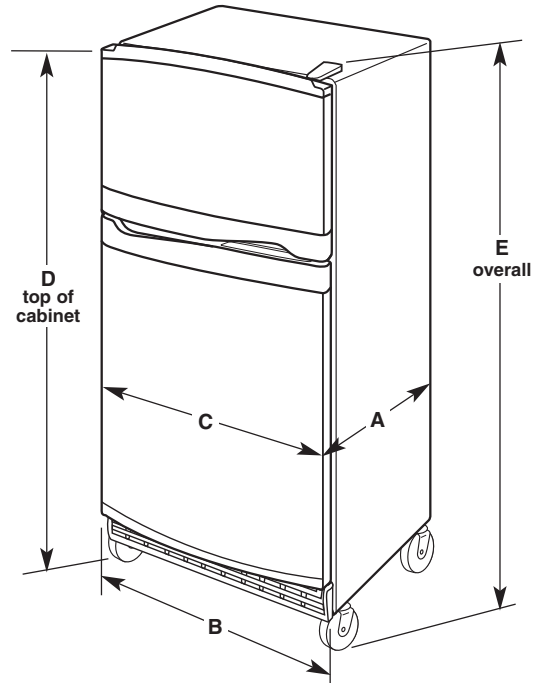

Shown with casters installed.

Model size	Depth "A"	Cab. Width "B"	Door Width "C"	Cab. Height "D"		Overall Height "E"	
				rollers	w/casters	rollers	w/casters
19 cu.ft.	31-1/2" (80 cm)	29-1/2" (74.9 cm)	30-1/8" (76.5 cm)	65-1/2" (166.4 cm)	72-1/8" (183.2 cm)	66-1/2" (168.9 cm)	73-1/8" (185.7 cm)

## LOCATION REQUIREMENTS

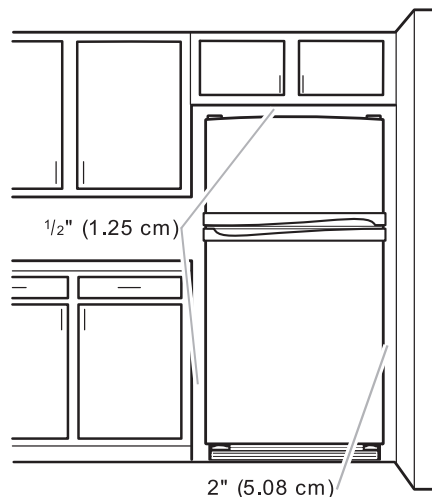

To ensure proper ventilation for your convertible refrigerator/freezer, allow for 1/2" (1.25 cm) space on each side and at the top. When installing your convertible refrigerator/freezer next to a fixed wall, leave 2" (5.08 cm) minimum clearance on each side to allow for the door to swing open.

**NOTE:** Do not install the convertible refrigerator/freezer near an oven, radiator, or other heat source where temperature will rise above 110°F (43°C), nor in a location where the temperature will fall below 0°F (-17°C).